



ORGILL

PRODUCT CATALOG



BUILT TO LAST

At Superior Pump we*build high quality pumps.*

With a combined **150** years of pump industry experience,
every pump is built using cutting edge innovative technology and high quality components.



STANDARD FEATURES

Five Standard Features

Superior Pumps are built to last using five standard features that increase durability and efficiency.



WARRANTY & CUSTOMER SUPPORT

Superior Pump stands behind every single product with an industry standard warranty, live customer service (1-800-495-9278) and online support (www.superiorpump.com).


Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/4HP UTILITY

ORGILL SKU # 2261253

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

THERMOPLASTIC

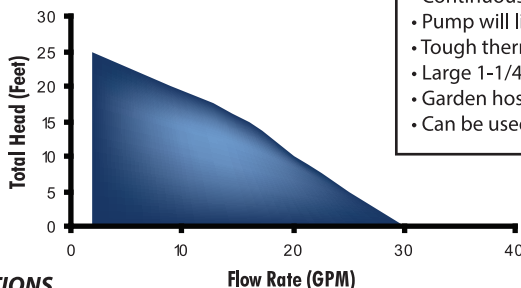

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Tough thermoplastic construction
- Large 1-1/4" discharge for high capacity pumping
- Garden hose adapter included
- Can be used as a sump pump by adding an optional float switch



TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Cord Length	Solids Handling	Warranty
91250	1/4	3.8	Thermoplastic	1-1/4"	Top	10'	1/8"	1 Year

PERFORMANCE


Head	GPM	GPH
0'	30	1800
5'	22	1320
10'	20	1200
15'	16	960
20'	9	540
25'	2	120

1/3HP UTILITY

ORGILL SKU # 7019334

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

THERMOPLASTIC

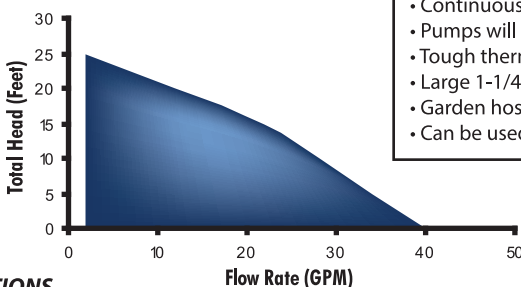

- Continuous duty, thermally protected - split capacitor motors
- Pumps will lift water up to 25' of vertical height
- Tough thermoplastic construction
- Large 1-1/4" discharge for high capacity pumping
- Garden hose adapter included
- Can be used as a sump pump by adding an optional float switch



TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Cord Length	Solids Handling	Warranty
91330	1/3	4.1	Thermoplastic	1-1/4"	Top	10'	1/8"	1 Year

PERFORMANCE


Head	GPM	GPH
0'	40	2400
5'	34	2040
10'	28	1680
15'	22	1320
20'	12	720
25'	2	120

1/2HP UTILITY

ORGILL SKU # 7019474

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

THERMOPLASTIC

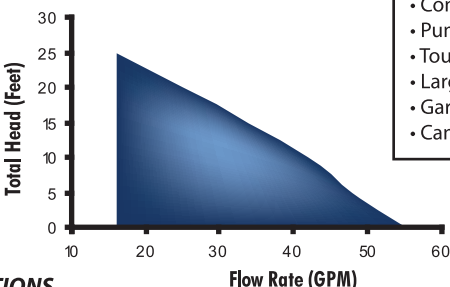

- Continuous duty, thermally protected - split capacitor motors
- Pumps will lift water up to 25' of vertical height
- Tough thermoplastic construction with stainless steel impeller
- Large 1-1/2" discharge for high capacity pumping
- Garden hose adapter included
- Can be used as a sump pump by adding an optional float switch



TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Cord Length	Solids Handling	Warranty
91570	1/2	4.9	Thermoplastic	1-1/2"	Side	10'	3/8"	3 Year

PERFORMANCE


Head	GPM	GPH
0'	55	3300
5'	48	2880
10'	42	2520
15'	34	2040
20'	25	1500
25'	16	960

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/3HP SUMP

ORGILL SKU # 6990857

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

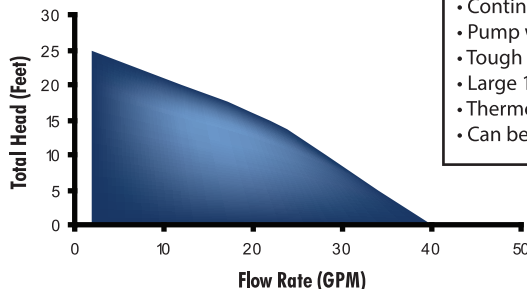

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Tough thermoplastic construction
- Large 1-1/4" or 1-1/2" discharge for high capacity pumping
- Thermoplastic impeller
- Can be used as a utility pump by removing the float switch



THERMOPLASTIC

PERFORMANCE

Head	GPM	GPH
0'	40	2400
5'	34	2040
10'	28	1680
15'	22	1320
20'	12	720
25'	2	120


TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92330	1/3	4.1	Thermoplastic	1-1/4"-1-1/2"	Top	Tethered	10'	1/8"	1 Year

1/3HP SUMP

ORGILL SKU # 5049382

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

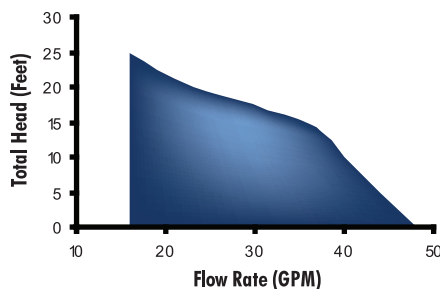

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Tough thermoplastic construction
- Large 1-1/2" discharge for high capacity pumping
- Thermoplastic impeller
- Can be used as a utility pump by removing the float switch



THERMOPLASTIC

PERFORMANCE

Head	GPM	GPH
0'	48	2880
5'	44	2640
10'	40	2400
15'	36	2160
20'	23	1380
25'	16	960


TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92370	1/3	4.1	Thermoplastic	1-1/2"	Side	Tethered	10'	3/8"	1 Year

1/3HP SUMP

ORGILL SKU # 8793671

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

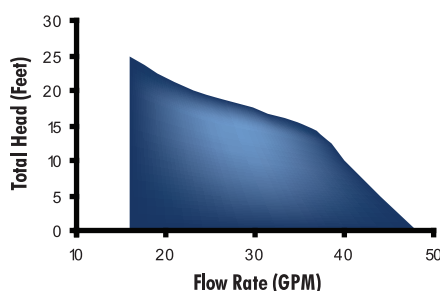

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Tough thermoplastic construction
- Large 1-1/2" discharge for high capacity pumping
- Thermoplastic impeller
- Can be used as a utility pump by removing the float switch



THERMOPLASTIC

PERFORMANCE

Head	GPM	GPH
0'	48	2880
5'	44	2640
10'	40	2400
15'	36	2160
20'	23	1380
25'	16	960

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92372	1/3	4.1	Thermoplastic	1-1/2"	Side	Vertical	10'	3/8"	1 Year


Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/3HP SUMP

ORGILL SKU # 6198048

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

CAST IRON

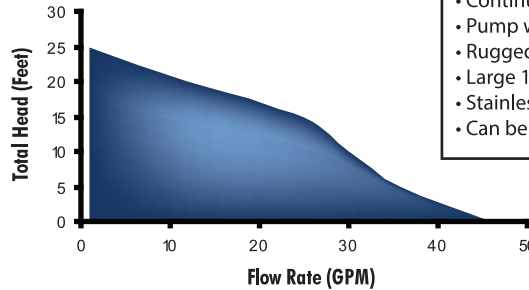

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Rugged cast iron construction
- Large 1-1/2" discharge for high capacity pumping
- Stainless steel impeller
- Can be used as a utility pump by removing the float switch



TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92331	1/3	4.1	Cast Iron	1-1/2"	Side	Tethered	10'	3/8"	3 Years

PERFORMANCE


Head	GPM	GPH
0'	46	2760
5'	36	2160
10'	30	1800
15'	25	1500
20'	12	720
25'	1	60

1/3HP SUMP

ORGILL SKU # 7417629

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

CAST IRON

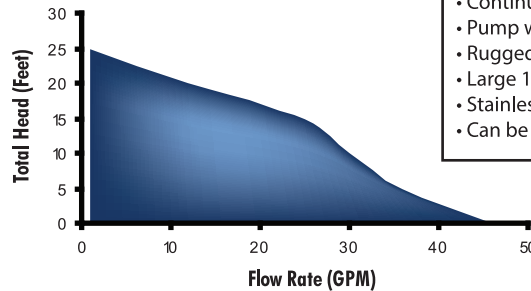

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Rugged cast iron construction
- Large 1-1/2" discharge for high capacity pumping
- Stainless steel impeller
- Can be used as a utility pump by removing the float switch



TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92341	1/3	4.1	Cast Iron	1-1/2"	Side	Vertical	10'	3/8"	3 Years

PERFORMANCE


Head	GPM	GPH
0'	46	2760
5'	36	2160
10'	30	1800
15'	25	1500
20'	12	720
25'	1	60

1/3HP SUMP

ORGILL SKU # 5049416

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

CAST IRON

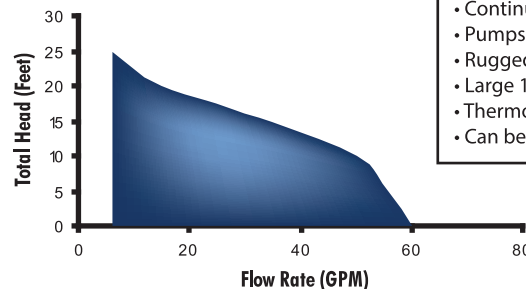

- Continuous duty, thermally protected - split capacitor motors
- Pumps will lift water up to 25' of vertical height
- Rugged cast iron construction
- Large 1-1/2" discharge for high capacity pumping
- Thermoplastic impeller
- Can be used as a utility pump by removing the float switch



TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92352	1/3	7.6	Cast Iron	1-1/2"	Side	Vertical	10'	1/2"	3 Years

PERFORMANCE

Head	GPM	GPH
0'	60	3600
5'	56	3360
10'	50	3000
15'	35	2100
20'	15	900
25'	6	360


Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/2HP SUMP

ORGILL SKU # 3644416

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

THERMOPLASTIC

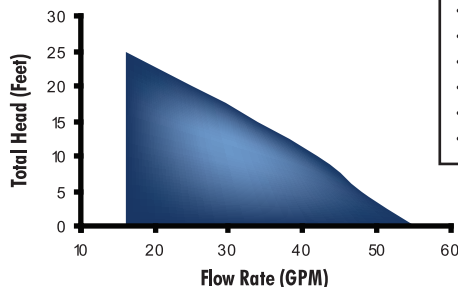

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Tough thermoplastic construction
- Large 1-1/2" discharge for high capacity pumping
- Stainless steel impeller
- Can be used as a utility pump by removing the float switch



PERFORMANCE

Head	GPM	GPH
0'	55	3300
5'	48	2880
10'	42	2520
15'	34	2040
20'	25	1500
25'	16	960

TECHNICAL SPECIFICATIONS


Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92572	1/2	4.9	Thermoplastic	1-1/2"	Side	Vertical	10'	3/8"	3 Years

1/2HP SUMP

ORGILL SKU # 3644440

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

CAST IRON

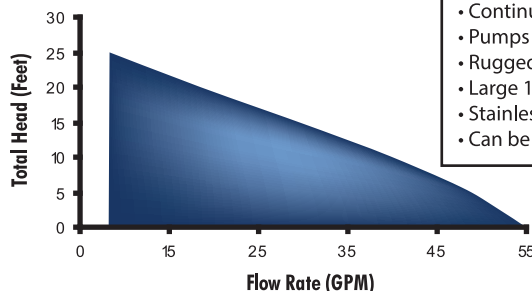

- Continuous duty, thermally protected - split capacitor motors
- Pumps will lift water up to 25' of vertical height
- Rugged cast iron construction
- Large 1-1/2" discharge for high capacity pumping
- Stainless steel impeller
- Can be used as a utility pump by removing the float switch



PERFORMANCE

Head	GPM	GPH
0'	55	3300
5'	49	2940
10'	40	2400
15'	29	1740
20'	18	1080
25'	8	480

TECHNICAL SPECIFICATIONS


Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92541	1/2	4.9	Cast Iron	1-1/2"	Side	Vertical	10'	3/8"	3 Years

1/2HP SUMP

ORGILL SKU # 2522217

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

CAST IRON

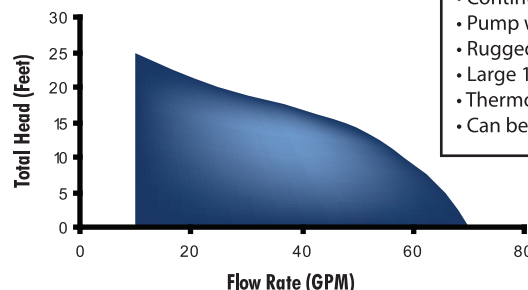

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Rugged cast iron construction
- Large 1-1/2" discharge for high capacity pumping
- Thermoplastic impeller
- Can be used as a utility pump by removing the float switch



PERFORMANCE

Head	GPM	GPH
0'	70	4200
5'	66	3960
10'	58	3480
15'	48	2880
20'	25	1500
25'	10	600

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92501	1/2	7.6	Cast Iron	1-1/2"	Side	Tethered	10'	1/2"	3 Years

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225


1/2HP SUMP

ORGILL SKU # 3644424

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



CAST IRON

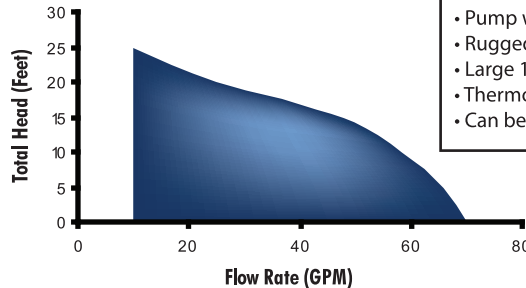

- Continuous duty, thermally protected - split capacitor motor
- Pump will lift water up to 25' of vertical height
- Rugged cast iron construction
- Large 1-1/2" discharge for high capacity pumping
- Thermoplastic impeller
- Can be used as a utility pump by removing the float switch



PERFORMANCE

Head	GPM	GPH
0'	70	4200
5'	66	3960
10'	58	3480
15'	48	2880
20'	25	1500
25'	10	600

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92511	1/2	7.6	Cast Iron	1-1/2"	Side	Vertical	10'	1/2"	3 Years


1/2HP SUMP

ORGILL SKU # 3644457

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



STAINLESS STEEL / CAST IRON

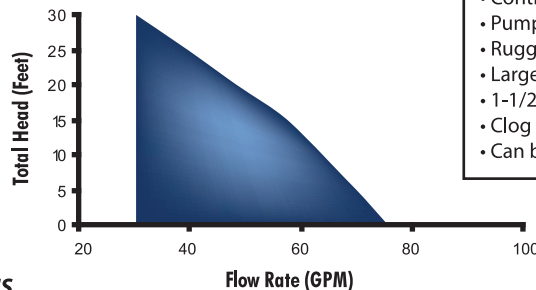

- Continuous duty, thermally protected - split capacitor motors
- Pumps will lift water up to 25' of vertical height
- Rugged cast iron / stainless steel construction
- Large 2" discharge for high capacity pumping
- 1-1/2" NPT adapter included
- Clog resistant thermoplastic vortex impeller
- Can be used as a utility pump by removing the float switch



PERFORMANCE

Head	GPM	GPH
0'	75	4500
5'	70	4200
10'	64	3840
15'	57	3420
20'	49	2940
25'	40	2400

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92571	1/2	7.5	Stainless/ Cast Iron	2"	Side	Vertical	10'	1/2"	3 Years


3/4HP SUMP

ORGILL SKU # 4741666

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



STAINLESS STEEL / CAST IRON

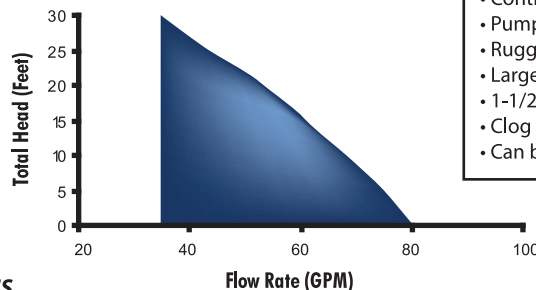

- Continuous duty, thermally protected - split capacitor motors
- Pumps will lift water up to 25' of vertical height
- Rugged cast iron / stainless steel construction
- Large 2" discharge for high capacity pumping
- 1-1/2" NPT adapter included
- Clog resistant thermoplastic vortex impeller
- Can be used as a utility pump by removing the float switch



PERFORMANCE

Head	GPM	GPH
0'	80	4800
5'	75	4500
10'	69	4140
15'	61	3660
20'	55	3300
25'	45	2700

TECHNICAL SPECIFICATIONS


Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92751	3/4	7.5	Stainless/ Cast Iron	2"	Side	Vertical	10'	1/2"	3 Years

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/3HP READY TO GO SUMP

ORGILL SKU # 2522225

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

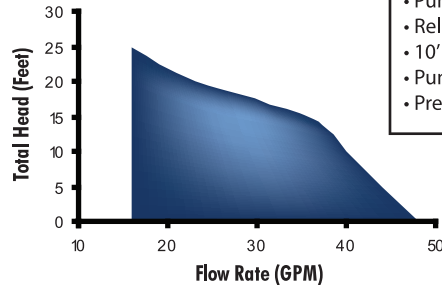

- Pump is mounted to base to prevent clogging and switch malfunction
- Reliable vertical float switch
- 10' power cord
- Pump will lift water up to 25' of vertical height
- Pre-plumbed with check valve and discharge pipe



THERMOPLASTIC

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Pipe	Cord Length	Solids Handling	Warranty
92372RTG-P	1/3	4.1	Thermoplastic	1-1/2"	PVC	10'	3/8"	1 Year


PERFORMANCE

Head	GPM	GPH
0'	48	2880
5'	44	2640
10'	40	2400
15'	36	2160
20'	23	1380
25'	16	960

1/3HP PEDESTAL SUMP

ORGILL SKU # 7417645

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

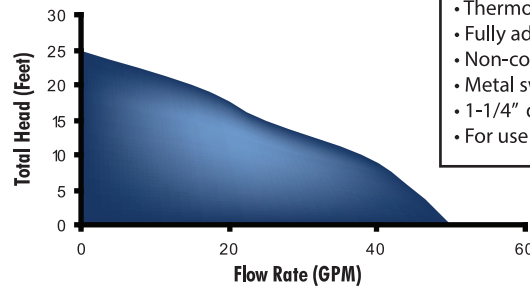

- Thermoplastic base
- Fully adjustable automatic switch
- Non-corrosive steel drive shaft
- Metal switch arm for strength and durability
- 1-1/4" discharge for high capacity pumping
- For use in sump basins 12" or larger

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Base Material	Discharge Size	Column Material	Impeller Material	Cord Length	Warranty
92333	1/3	2.76	Thermoplastic	1-1/4"	Thermoplastic	Stainless Steel	10'	1 Year


PERFORMANCE

Head	GPM	GPH
0'	50	3000
5'	45	2700
10'	38	2280
15'	35	2100
20'	15	900

1/3HP PEDESTAL SUMP

ORGILL SKU # 6990873

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

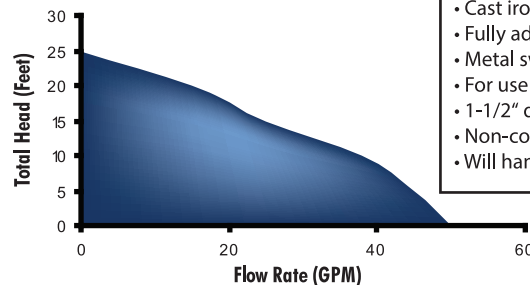

- Cast iron base
- Fully adjustable automatic switch
- Metal switch arm for strength and durability
- For use sump basins 12" or larger
- 1-1/2" discharge for high capacity pumping
- Non-corrosive stainless steel drive shaft, impeller & float ball
- Will handle liquids up to 180°F

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Base Material	Discharge Size	Column Material	Impeller Material	Cord Length	Warranty
92301	1/3	2.76	Cast Iron	1-1/2"	Steel	Stainless Steel	10'	3 Year

PERFORMANCE


Head	GPM	GPH
0'	50	3000
5'	45	2700
10'	38	2280
15'	35	2100
20'	15	900

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/2HP PEDESTAL SUMP

ORGILL SKU # 3644432

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

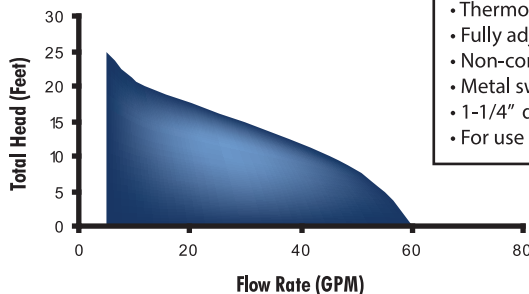

- Thermoplastic base
- Fully adjustable automatic switch
- Non-corrosive steel drive shaft
- Metal switch arm for strength and durability
- 1-1/4" discharge for high capacity pumping
- For use in sump basins 12" or larger

THERMOPLASTIC

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Base Material	Discharge Size	Column Material	Impeller Material	Cord Length	Warranty
92553	1/2	3.06	Thermoplastic	1-1/2"	Thermoplastic	Stainless Steel	10'	1 Year


PERFORMANCE

Head	GPM	GPH
0'	60	3600
5'	55	3330
10'	45	2700
15'	30	1800
20'	12	720
25'	5	300

1/2HP PEDESTAL SUMP

ORGILL SKU # 3644465

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

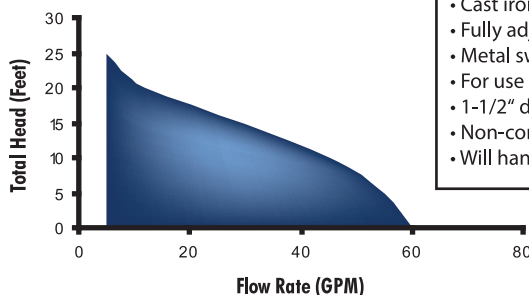

- Cast iron base
- Fully adjustable automatic switch
- Metal switch arm for strength and durability
- For use sump basins 12" or larger
- 1-1/2" discharge for high capacity pumping
- Non-corrosive stainless steel drive shaft, impeller & float ball
- Will handle liquids up to 180°F

STAINLESS STEEL / CAST IRON

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Base Material	Discharge Size	Column Material	Impeller Material	Cord Length	Warranty
92551	1/2	3.06	Cast Iron	1-1/2"	Steel	Stainless Steel	10'	5 Year


PERFORMANCE

Head	GPM	GPH
0'	60	3600
5'	55	3330
10'	45	2700
15'	30	1800
20'	12	720
25'	5	300

1/2HP SEWAGE

ORGILL SKU # 4741625

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

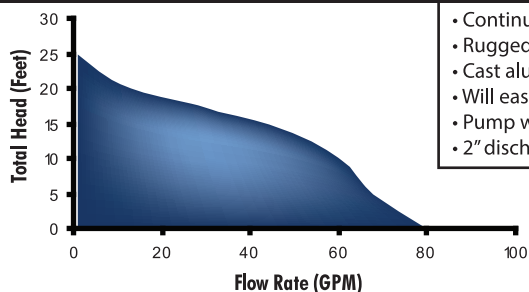

- Continuous duty, thermally protected - split capacitor motor
- Rugged cast iron construction
- Cast aluminum, non-clogging vortex impeller
- Will easily handle 2" solids
- Pump will lift water up to 25' of vertical height
- 2" discharge for high capacity pumping



CAST IRON

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Switch Type	Cord Length	Solids Handling	Warranty
93501	1/2	7.6	Cast Iron	2"	Tethered	10'	2"	1 Year

PERFORMANCE

Head	GPM	GPH
0'	80	4800
5'	68	4080
10'	60	3600
15'	44	2640
20'	13	780
25'	2	120

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

93015 SEWAGE KIT

ORGILL SKU # 4741633

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

PRE-ASSEMBLED

Pre-assembled kit is ready for installation



Pump Features

- Model **93501** 1/2 hp sewage pump
- Tethered float switch
- Rugged cast iron construction
- Cast aluminum, non-clogging vortex impeller
- Will easily handle 2" solids
- 2" discharge for high capacity pumping
- 80 gallons per minute / 4800 gallons per hour



Basin Features

- Corrosion resistant structural foam construction
- Air tight molded reusable PVC gasket
- Size: 18" x 30"
- 18" premium cover
- 4" inlet hub
- 2" discharge & vent
- 30 gallon capacity
- Built-in torque stops



Torque Stops

Check Valve Features

- Heavy duty rubber boots with stainless steel clamps
- Full flow design with 2" connections



4" Inlet Hub Features

- Fits 4" DWV schedule 40/80 pipe
- Water and vapor tight seal with no caulking




75 AH SEALED AGM BATTERY

ORGILL SKU # 7151525

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

MAINTENANCE FREE - DEEP CYCLE

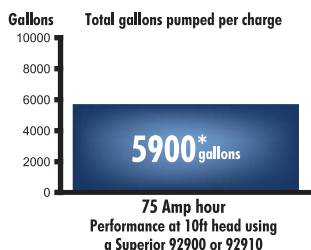

- Sealed AGM (absorbent glass mat) lead acid design
- Spill proof design
- Longer run times
- Longer service life
- Up to 5 times faster charge compared to flooded battery
- No maintenance required
- Recommend for use with backup sump pump systems
- Will pump approximately 5900 gallons of water per charge*
- Battery dimensions: 10-1/4" L x 6-1/2" W x 9-1/2" H
- *Tested using a Superior Pump battery backup sump pump

TECHNICAL SPECIFICATIONS


Model	Voltage	Capacity	Chemistry	Type	Terminal Type	Weight	Warranty
99717	12	75AH	SLA (Sealed lead acid)	AGM (Absorbent glass mat)	Nut and Bolt	49.3 IBS	1 Year

BATTERY BACKUP KIT

ORGILL SKU # 4741641

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

THERMOPLASTIC

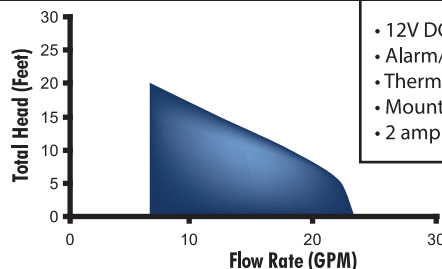

- 12V DC pump with tethered switch
- Alarm/control unit with fuse and mute feature
- Thermoplastic battery box
- Mounting hardware included
- 2 amp AC charger with power cord

TECHNICAL SPECIFICATIONS

Model	HP	Amps	Construction	Discharge Size	Discharge Type	Switch Type	Cord Length	Solids Handling	Warranty
92900	DC	12	Thermoplastic	1-1/4"-1-1/2"	Top	Tethered	10'	1/8"	1 Year

PERFORMANCE

Head	GPM	GPH
0'	23	1380
5'	22	1320
10'	18	1080
15'	13	780
20'	8	480
25'	-	-


Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

BATTERY BACKUP PRE-ASSEMBLED KIT

ORGILL SKU # 4741658

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

THERMOPLASTIC/CAST IRON

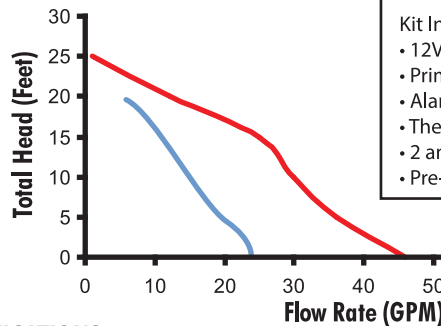

- Kit Includes**
- 12V DC back-up pump with vertical switch
 - Primary Pump (92341) with vertical switch
 - Alarm/control unit with fuse and mute feature
 - Thermoplastic battery box
 - 2 amp AC charger with power cord
 - Pre-assembled kit is ready to install

MODEL # 92941 - TECHNICAL SPECIFICATIONS

Pump Model	HP	Amps	Construction	Discharge Size	Discharge Type	Solids Handling	Warranty
DC Pump	-	12	Thermoplastic	1-1/4"-1-1/2"	Top	1/8"	3 Years
92341	1/3	4.1	Cast Iron	1-1/2"	Side	3/8"	3 Years

PERFORMANCE


Gallons per minute at listed discharge height						
0'	5'	10'	15'	20'	25'	
23	22	18	13	8	-	
46	36	30	25	12	1	

115VOLT TRANSFER PUMP

ORGILL SKU # 2261329

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

SELF PRIMING

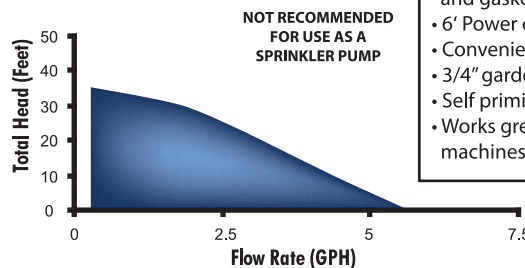

NOT RECOMMENDED
FOR USE AS A
SPRINKLER PUMP

- Includes 6' suction hose, suction attachment, extra impeller and gasket kit
- 6' Power cord
- Convenient carrying handle
- 3/4" garden hose connections
- Self priming up to 7' depth
- Works great for draining water heaters, water beds, washing machines, or for filling radiant heating systems

TECHNICAL SPECIFICATIONS

Model	Volts	Amps	Construction	Suction / Discharge Size	Cord Length	Cooling Type	Warranty
90040	115	8.4	Cast Iron	3/4" GHT	10'	Fan	1 Year

PERFORMANCE


Head	GPM	GPH
0'	5.5	330
10'	4.5	270
20'	3.3	198
30'	1.9	114
35'	1	60

1/2HP TRANSFER PUMP

ORGILL SKU # 2261303

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

CAST IRON



NOT RECOMMENDED
FOR USE AS A
SPRINKLER PUMP

- Rugged cast iron construction
- 3/4" NPT suction & discharge
- 10' power cord
- Built in carrying handle
- Includes: brass garden hose adapters, suction strainer & an additional set of motor brushes
- Multiple Uses: Drain water heaters, fill radiant heating systems, as a pressure booster, water transfers

TECHNICAL SPECIFICATIONS PSI PERFORMANCE

Model	HP	Amps	Warranty
90050	1/2	8.4	1 Year

Construction	Suction / Discharge Size
Cast Iron	3/4"NPT/GHT

Discharge Pressure	0 psi	10 psi	20 psi	30 psi	40 psi
GPH at 0 Feet	1500	1370	1140	890	610
GPH at 5 Feet	1420	1300	1070	820	540
GPH at 10 Feet	1350	1190	1000	750	480

MAXIMUM DISCHARGE PRESSURE: 52 PSI • MAXIMUM LIQUID TEMPERATURE: 140°F

PERFORMANCE

Head	GPM	GPH
0'	25	1500
30'	19	1140
60'	13	780
90'	7	420
110'	3	180

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1 HP SPRINKLER PUMP

ORGILL SKU # 7110463

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



MODEL 96110

- 1 HP fan cooled, 115 volt motor
- Corrosion resistant stainless steel housing
- Integral carry handle for portability
- Convenient on/off switch
- 1" NPT suction and discharge
- 165' total dynamic head
- Garden hose adapters included

TECHNICAL SPECIFICATIONS

Model	HP	Volts	Amps	Suction Size	Discharge/ Drive Port Size	GHT Adapters	Max Pressure	Max Flow Rate	Overload Protection	Warranty
96110	1	115	5.2	1" NPT	1" NPT	Yes	72 psi	830 GPH	Yes	1 Year

Approximate output at listed discharge height

Lift	0'	5'	10'	15'	20'	25'	Maximum Pressure
GPH	830	750	610	495	350	220	72 psi

1/2 HP CONVERTIBLE JET

ORGILL SKU # 7110489

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



MODEL 94515

- 1/2 HP dual voltage motor (115/230v)
- Rugged cast iron pump body for durability
- Tough thermoplastic impeller
- Glass filled thermoplastic diffuser
- Cast iron seal plate
- Pre-mounted, fully adjustable pressure switch
- For shallow well application up to 25' depth
- Can be used in deep well applications

TECHNICAL SPECIFICATIONS

Model	HP	Volts	Amps	Suction Size	Discharge/ Drive Port Size	Pressure Switch	Max Pressure	Max Flow Rate	Overload Protection	Warranty
94515	1/2	115 / 230	6.4 / 3.2	1-1/4" NPT	1"	20/40	58 psi	9.9 GPM	Yes	1 Year

Approximate gallon per minute output at 40 psi

Lift	0'	5'	10'	15'	20'	25'	30'	40'	50'	60'	70'	80'	Maximum Pressure
GPM	7.0	6.2	5.8	5.1	4.5	3.8	3.3	2.0	0.8	-	-	-	58 psi

Approximate output (GPM at discharge pressures) - Pumping Depth to Water in Feet - Maximum pressure rating for shallow well applications

1 HP CONVERTIBLE JET

ORGILL SKU #7019359

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



MODEL 94115

- 1 HP dual voltage motor (115/230v)
- Rugged cast iron pump body for durability
- Tough thermoplastic impeller
- Glass filled thermoplastic diffuser
- Cast iron seal plate
- Pre-mounted, fully adjustable pressure switch
- For shallow well application up to 25' depth
- Can be used in deep well applications

TECHNICAL SPECIFICATIONS

Model	HP	Volts	Amps	Suction Size	Discharge/ Drive Port Size	Pressure Switch	Max Pressure	Max Flow Rate	Overload Protection	Warranty
94115	1	115 / 230	10 / 5	1-1/4" NPT	1"	20/40	71 psi	13.2 GPM	Yes	1 Year

Approximate gallon per minute output at 40 psi

Lift	0'	5'	10'	15'	20'	25'	30'	40'	50'	60'	70'	80'	Maximum Pressure
GPM	10.5	10.1	9.4	8.7	8.0	7.4	6.6	4.8	3.7	2.9	2.3	1.6	71 psi

Approximate output (GPM at discharge pressures) - Pumping Depth to Water in Feet - Maximum pressure rating for shallow well applications

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

1/2HP SHALLOW WELL JET

ORGILL SKU # 7110471

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



MODEL 94505

- 1/2 HP dual voltage motor (115/230v)
- Rugged cast iron pump body for durability
- Tough thermoplastic impeller
- Glass filled thermoplastic diffuser
- Cast iron seal plate
- Pre-mounted, fully adjustable pressure switch
- For shallow well application up to 25' depth

TECHNICAL SPECIFICATIONS

Model	HP	Volts	Amps	Suction Size	Discharge/ Drive Port Size	Pressure Switch	Max Pressure	Max Flow Rate	Overload Protection	Warranty
94505	1/2	115 / 230	6.4 / 3.2	1-1/4" NPT	1"	20/40	67 psi	12.5 GPM	Yes	1 Year

Approximate gallon per minute output at 40 psi

Lift	0'	5'	10'	15'	20'	25'	Maximum Pressure
GPM	10	9.5	8.8	8.2	7.5	6.8	67 psi

Approximate output (GPM at discharge pressures)
Pumping depth to water in feet
Maximum pressure rating for shallow well applications

3/4HP SHALLOW WELL JET

ORGILL SKU # 7019342

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



MODEL 94705

- 3/4 HP dual voltage motor (115/230v)
- Rugged cast iron pump body for durability
- Tough thermoplastic impeller
- Glass filled thermoplastic diffuser
- Cast iron seal plate
- Pre-mounted, fully adjustable pressure switch
- For shallow well application up to 25' depth

TECHNICAL SPECIFICATIONS

Model	HP	Volts	Amps	Suction Size	Discharge/ Drive Port Size	Pressure Switch	Max Pressure	Max Flow Rate	Overload Protection	Warranty
94705	3/4	115 / 230	7.8 / 3.9	1-1/4" NPT	1"	20/40	74 psi	13.75 GPM	Yes	1 Year

Approximate gallon per minute output at 40 psi

Lift	0'	5'	10'	15'	20'	25'	Maximum Pressure
GPM	11.8	11.3	10.8	10.2	9.3	8.3	74 psi

Approximate output (GPM at discharge pressures)
Pumping depth to water in feet
Maximum pressure rating for shallow well applications

FOOT VALVES

Orgill SKU #	Orgill WHSE Locations	Model	Material	Size
6111082	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99490	ABS	3/4", 1", 1-1/4", 1-1/2" MPT
8516197	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99494	No lead brass & stainless steel	1-1/2" FPT



99490



99494

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

FLOAT SWITCHES

92000 ORGILL SKU # 6990881

92010 ORGILL SKU 6990907

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



92000
Tethered
Float
Switch



92010
Vertical
Float
Switch

MODEL 92000 & 92010

- **92000** - Non-mercury tethered float switch - 10' cord with piggy back plug
- **92010** - SJE Rhombus vertical float switch - 10' cord with piggy back plug

PEDESTAL SUMP PUMP FLOAT SWITCH

ORGILL SKU #7151509

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



- Universal design replaces most external pedestal pump float switches
- Durable metal switch arm
- Includes wire leads and mounting hardware
- 120 Volts AC: Max pump running current: 12 Amps
- 250 Volts AC: Max pump running current: 8 Amps

MODEL 99100



UNIVERSAL SUMP PUMP HOSE KIT

ORGILL SKU #7019417

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



- Works with all pumps with a discharge size of 1-1/4" or 1-1/2"
- For permanent or temporary use
- 1-1/4" x 24' poly drainage tubing
- Includes 1-1/4" and 1-1/2" adapters with rust resistant hose clamp

MODEL 99624

1-1/2" SUMP PUMP HOSE KIT

ORGILL SKU #6175863

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



- Work with all pumps with a discharge size of 1-1/2"
- For permanent or temporary use
- 1-1/2" x 24' poly drainage tubing
- Includes 1-1/2" adapter with rust resistant hose clamp

MODEL 99625

SUMP HOSE CONNECTOR SLEEVE

ORGILL SKU # 8860959

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



- For use in most sump pump installations
- High quality rubber construction
- 1-1/2" inlet and outlet
- 10" overall length
- Includes two stainless steel hose clamps
- Includes two 1-1/4" rubber adapters

MODEL 99513

DRILL PUMP

ORGILL SKU # 2261352

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID



- Easy to install - Works with most drills - Maximum drill speed 1200 rpm
- Recommended drill chuck size: 3/8" or larger
- Thermoplastic construction
- Corrosion resistant steel shaft
- 3/4" suction and discharge



MODEL 90065

Superior Pump • 2301 Traffic St. NE • Minneapolis, MN 55413 USA • 800-495-9278
Proudly represented by J.L. Smith & Associates • Phone: 724-856-3662 • Fax: 724-856-3225

18"/36" HAND PUMP

ORGILL SKU # 2261337

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

MODEL 90300



- Multiple applications: Draining water from boats, toilets, sinks, rain barrels, pools, fountains, ponds, lakes and general water transfer
- Requires no electricity to operate pump
- Easy to assemble, requires no tools
- 6' drain hose & hose adapters

TECHNICAL SPECIFICATIONS

Model	Pumps Up To	Construction	Drain Hose Length	Pump Length	Electricity Required	Suction Attachment	Warranty
90300	1 Gal. Per 4 Strokes	Thermoplastic	6'	18" / 36"	No	Included	1 Year

CHECK VALVES

Orgill SKU #	Orgill WHSE Locations	Model	Material	Inlet	Outlet
8241283	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99477	ABS	1-1/4" MPT	1-1/4" or 1-1/2" Rubber Boot
7273915	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99479	ABS	1-1/2" MPT	1-1/4" or 1-1/2" Rubber Boot
6265698	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99507	ABS	1-1/4" MPT	1-1/4" Barb or 1-1/2" Slip
0729046	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99509	ABS	1-1/2" MPT	1-1/4" Barb or 1-1/2" Slip
7019375	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99522	ABS	1-1/2" Rubber Boot	1-1/2" Rubber Boot
7019367	TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID	99544	ABS	1-1/4" Rubber Boot	1-1/4" Rubber Boot



UNIVERSAL CHECK VALVE

ORGILL SKU #7019383

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID

MODEL 99555



- Model: 99555
- Package includes: One universal check valve and two adapters
- Made from durable ABS plastic
- High quality Nitril-Bruna N seal
- Fits all: 1-1/4" x 1-1/2" MPT & FPT

REMOTE WATER DETECTOR

ORGILL SKU # 6993463

TIFTON, GA INWOOD, WV SIKESTON, MO HURRICANE, UT KILGORE, TX POST FALLS, ID


EARLY WARNING TEXT AND EMAIL ALERTS



Use the Superior Pump 92130 remote water detector and your smartphone, tablet or computer to monitor for water leaks and high or low temperature/humidity levels. Simply connect the included gateway to your existing network router, register your remote monitor, then receive text and e-mail alerts. Great for: Home, second home, office, rental property, kitchen, bath, laundry, pool room, utility sink, sump pump, water heater, basement, garage, attic, greenhouse, farm, near aquarium and terrarium.

TECHNICAL SPECIFICATIONS

Model	Wireless Remote	Wet/Dry Sensor	Internet Gateway	Mounting Hardware
92130	W/Temp & Humidity	H2O Sensor / 6ft cable	Gateway / Bracket / AC Adapter / LAN Cable	Included

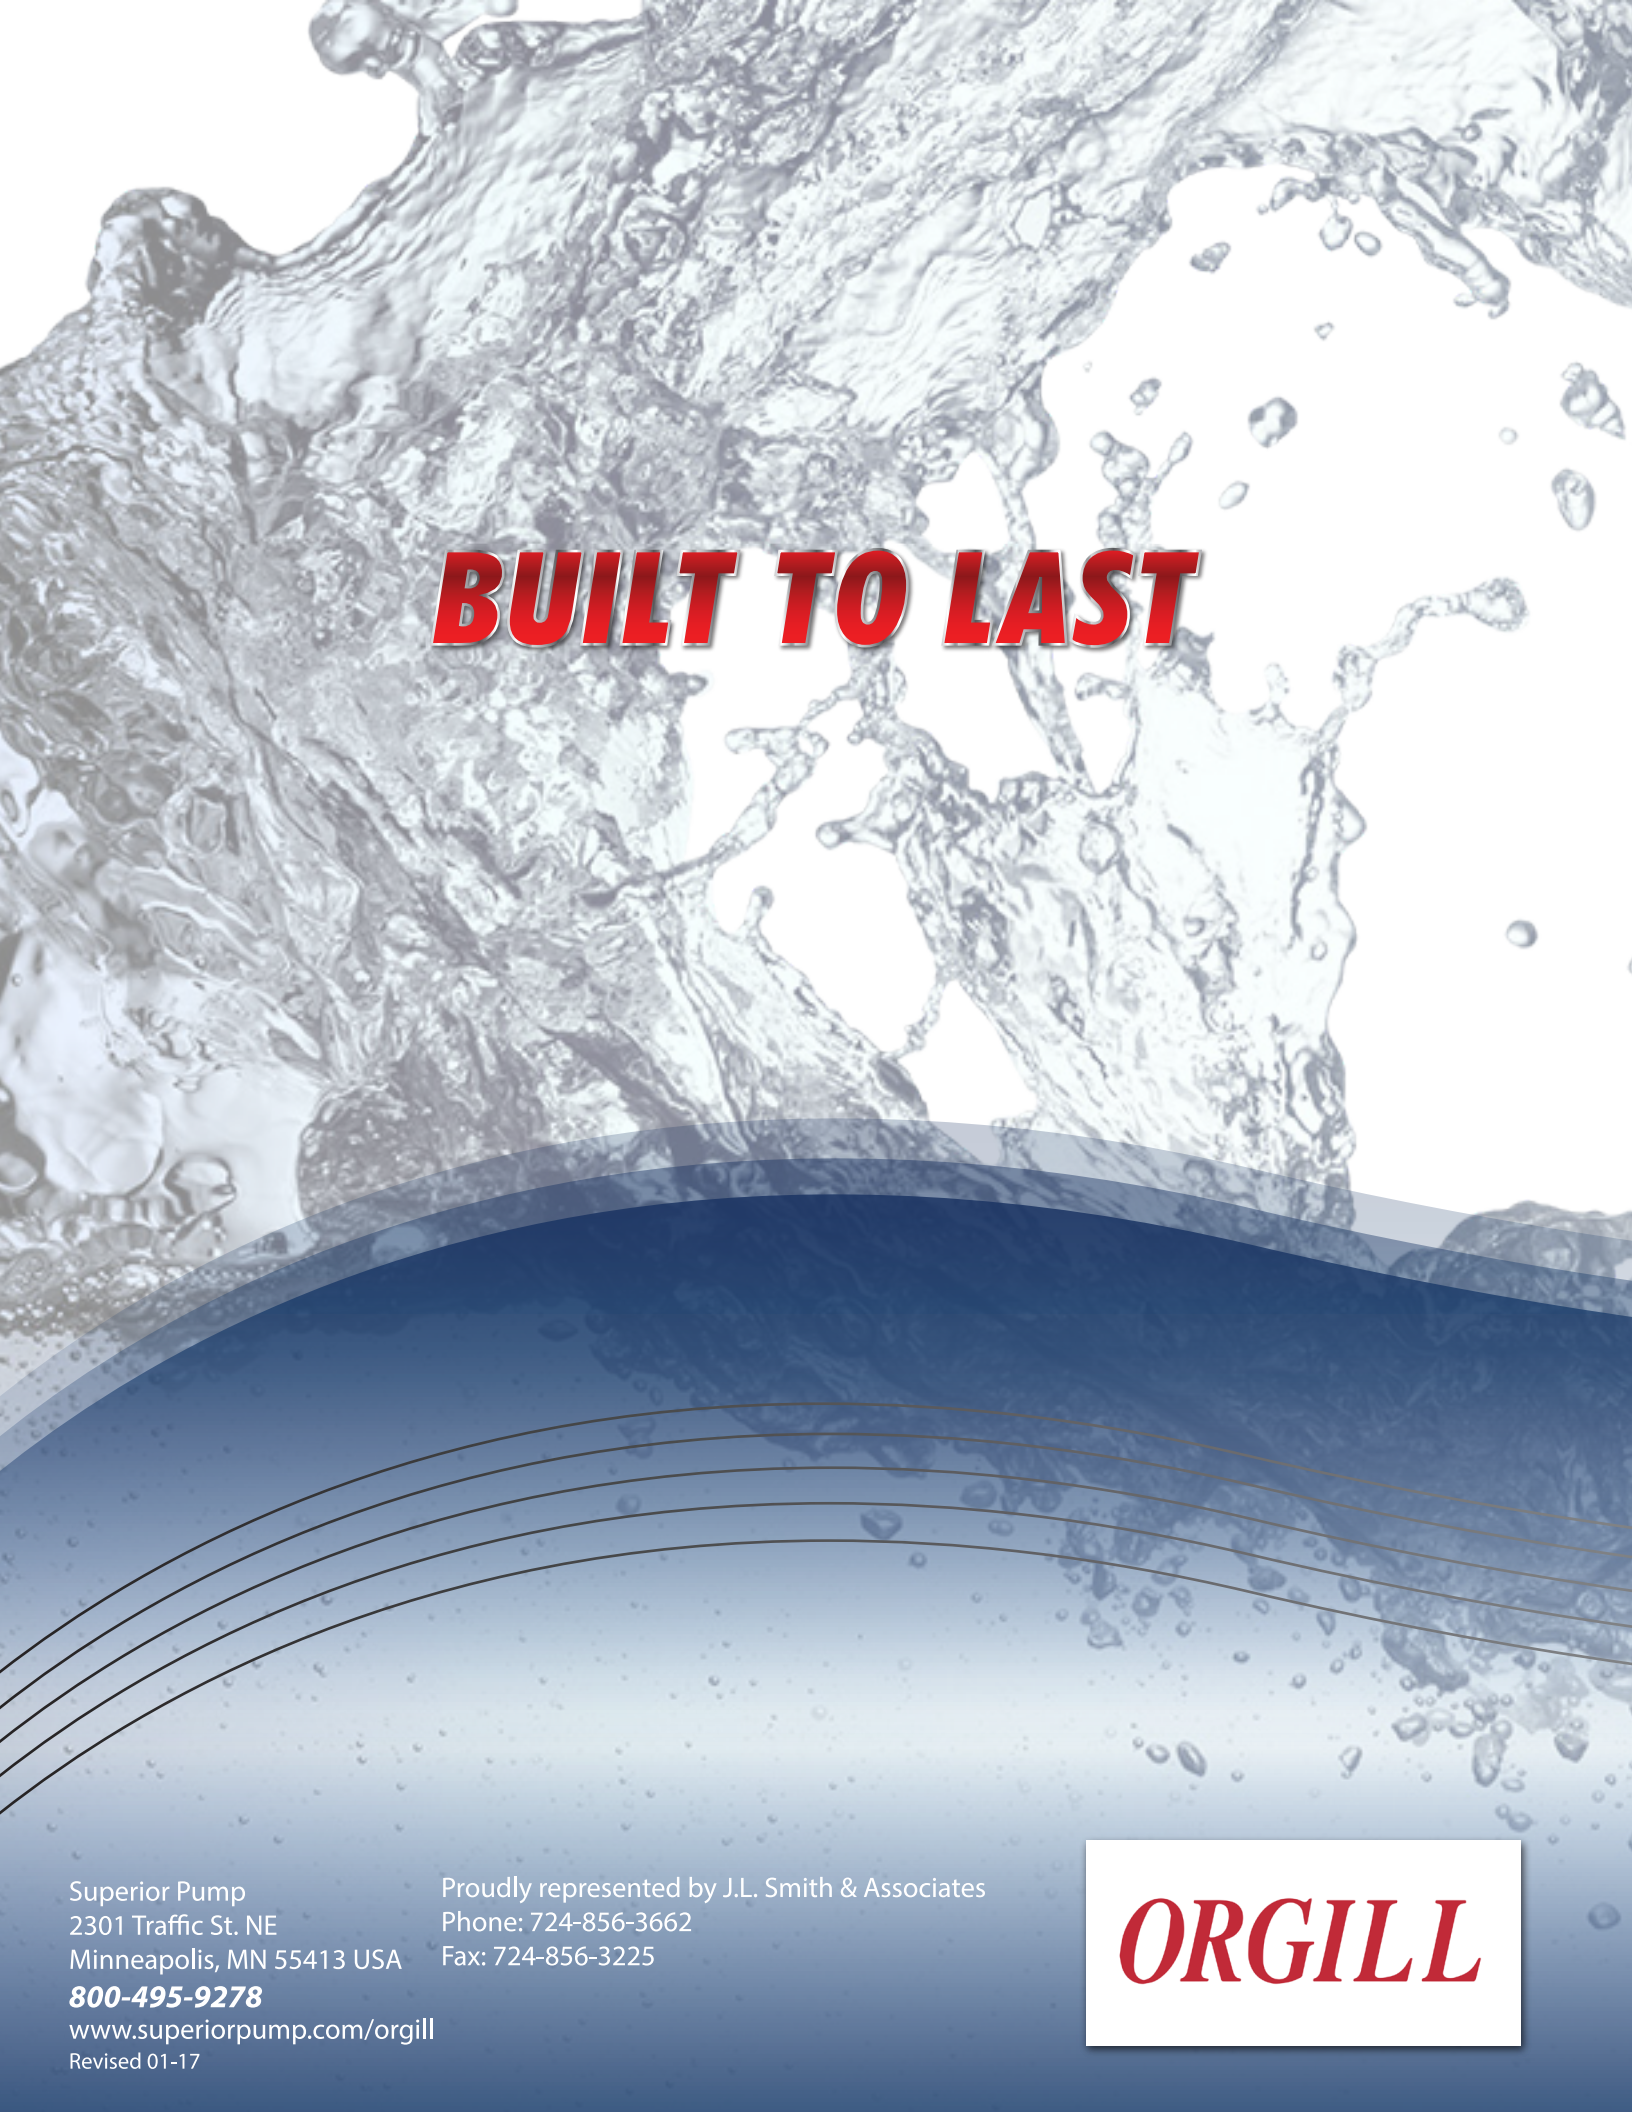A high-contrast, black and white photograph of a large splash of water, with many droplets and ripples, creating a dynamic and textured background. The splash is centered and fills most of the frame.

BUILT TO LAST

Superior Pump
2301 Traffic St. NE
Minneapolis, MN 55413 USA

800-495-9278

www.superiorpump.com/orgill

Revised 01-17

Proudly represented by J.L. Smith & Associates
Phone: 724-856-3662
Fax: 724-856-3225

ORGILL